

Is your carpet cleaning wand head worn out? Do you want to improve your cleaning speed?



**FIT A NEW SUPERWAND REPLACEABLE
"HEAD" TO YOUR WAND TUBE!!
AND ENJOY THE BEST TECHNOLOGY**

***Anyone can repair or upgrade their hot water extraction
wand in 10 minutes flat...***

***Simply cut off the old head and bolt on the Superwand
Replaceable head.***

***Supplied complete with 4 jets and hose connection -
no welding required -***

A GREAT SAVING!

Superwand Head Assembly only Part No: ES0058

Superwand Complete

Part No: ES0059

1. DRIER CLEANING RESULTS

The **Super wand** head is designed to improve cleaning efficiency by means of four stainless steel spray jets which are set at 40 degrees angle to maximise the kinetic energy of the spray impact and at the same time drive the dirt towards the suction inlet - this results in faster and dryer cleaning.

2. INCREASED VACUUM EFFICIENCY!

The Vacuum System of your machine will work more efficiently as the vacuum intake of the **Super wand** head features unrestricted smooth airflow engineering. Only possible with a one piece casting.

3. MORE CLEANING WITH LESS EFFORT!

The **Super wand** head is 355 mm wide (14"), it moves easily over the carpet on the stainless steel gliders fitted at the vacuum entry point. The low body design enables cleaning under furniture on low legs and it cleans right up to the skirting boards. There is no over-spray as the one piece casting holds all spray within the head width.

4. SEE HOW YOU ARE CLEANING & IMPRESS YOUR CUSTOMERS!

Cleancare's **Super wand** head is the only professional tool which features a large (75 mm dia) see through window enabling the operator to extract the maximum moisture from a just cleaned carpet or a flooded area. Just imagine how your customers will be impressed when you can show them the dirt being extracted from their carpets.

5. SIMPLE TO FIT TO YOUR EXISTING WAND TUBE.

Cleancare's Superwand head technology is now available for you to easily fit to your existing tool. Simply cut off the worn out head and slide the Superwand Replacement Head onto the tube. Tighten 2 screws to secure it, reattach the solution line to the barb, clamp it and you are in business - no welding required. Everything has been made easy for you to do.

Aerodynamic vacuum intake

One piece polished aluminium casting engineered to maximise airflow, for cleaner and dryer carpets. A large (75mm) clear acrylic window allows the operator to check maximum moisture is removed from the just cleaned area, or from a flooded carpet.

Your customers will be impressed when they can actually see the dirt sucked out of their carpet.

4 Stainless Steel Jets...

Set at the correct angle to maximise the kinetic force of your pump and drive the dirty solution towards the vacuum inlet. Faster, dryer carpet cleaning is the result.

Superwand cleans 355mm...

in one pass. Nearly 20 % more than ordinary wands, for greater cleaning speed.

Easy to use...

The Superwand head glides with minimum effort over all carpet surfaces on specially designed replaceable stainless steel shoes.

Low head profile

The tapered design of the Superwand head allows cleaning under most furniture on legs - cleans right up to the skirting without over-spray.


Think of the time saving as furniture shifting is kept to a minimum, not to mention how grateful your back will be!

When ordering the Superwand Head you will receive the following parts and instructions

Packing List:

Superwand Head Assembly
¼" Grub Screw x 2
Allen Key 1/8
Hose Clamp

Code No. ES0058
Code No. SO3090
Code No. SO9078
Code No. SO8502

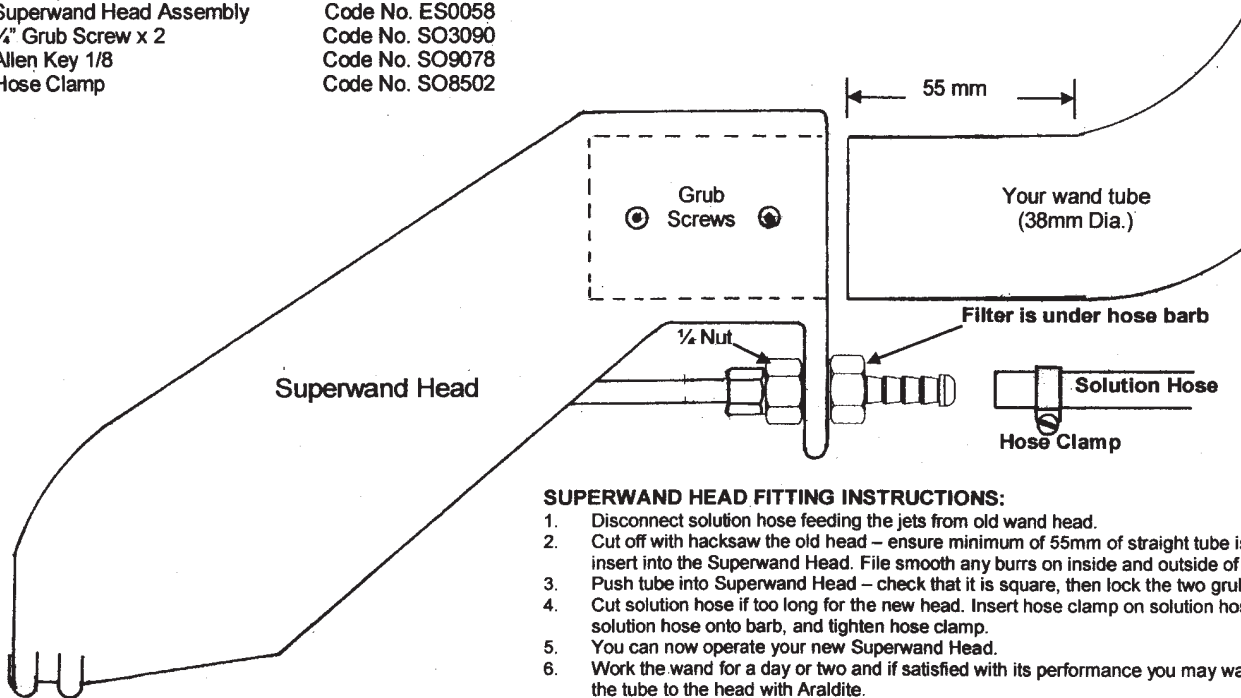

SUPERWAND HEAD FITTING INSTRUCTIONS:

1. Disconnect solution hose feeding the jets from old wand head.
2. Cut off with hacksaw the old head – ensure minimum of 55mm of straight tube is available to insert into the Superwand Head. File smooth any burrs on inside and outside of tube.
3. Push tube into Superwand Head – check that it is square, then lock the two grub screws tight.
4. Cut solution hose if too long for the new head. Insert hose clamp on solution hose, push solution hose onto barb, and tighten hose clamp.
5. You can now operate your new Superwand Head.
6. Work the wand for a day or two and if satisfied with its performance you may want to cement the tube to the head with Araldite.
7. To clean out filter system for the jets – loosen hose clamp, hold ½ nut with spanner and undo the hose barb – the ss filter may be removed for cleaning. Reassemble.

It's easy - but if you have a problem call Cleancare on 03 95682100

Cleancare Australia
15 Bastow Place Mulgrave Victoria 3170. Australia
Tel. 03 9590 0342 Interstate call toll free 1800335007 Fax. 03 9590 0408
info@cleancare.com.au

www.cleancare.com.au